



Premium Smooth Jacketing

Features:


- Easy to apply
- An aggressive all-weather acrylic adhesive system
- Tear resistant
- Puncture resistant
- Performs well over a wide range of environmental conditions
- Durable vapor barrier
- Excellent self adhesion
- Superior resistance to UV exposure, weather and mold
- White, Silver, Black
- Smooth Finish

Application:

Application surfaces must be clean, dry and free of contaminants. Apply pressure with plastic squeegee. Tape all seams with the coordinating Proline Plus™ jointing/seaming tape and apply pressure with squeegee.

Shelf Life & Storage:

Under ideal storage conditions of 60°F to 80°F and low humidity, shelf life is one year from date of purchase.

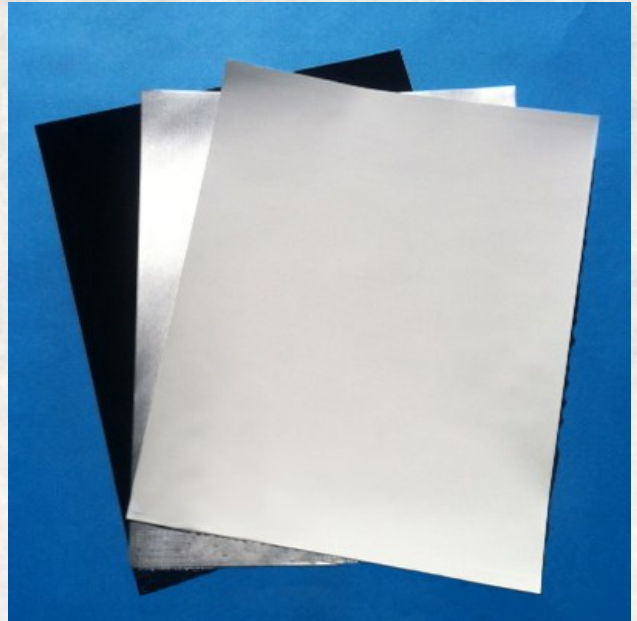

Performance Data

Test	Typical Values (English)	Typical Values (metric)	Test Method
Total Thickness without Liner	14.0 mils	0.356-mm	PSTC-133
Peel Adhesion to Stainless Steel	100-oz/in	27.8-N/25mm	PSTC-101
Shear Adhesion	>72 hours @ 2.2 psi	>72 hours @ 15.2kPa	PSTC-107
Tensile Strength	165-lbs/in	734-N/25mm	ASTM D 882
Elongation	69%	69%	PSTC-131
Permeance	0.00 perms	0.00 perms	ASTM E 96
Burst Strength	400-psi	2758-kPa	ASTM D 774
Puncture Resistance	80-lb	356-N	ASTM D 1000
Minimum Continuous Use Temperature	-40°F	-40°C	Mfg. Internal
Maximum Continuous Use Temperature	270°F	135°C	Mfg. Internal
Application Temperature Range	-25°F to 248°F	-32°C to 120°C	Mfg. Internal
Surface Burning Characteristics	≤25 Flame < 50 Smoke	≤ 25 Flame < 50 Smoke	UL 723* ASTM E 84

*Tested in accordance with UL 723

Roll Width	Roll Length	Rolls/Carton
23-in	150-ft	1
30-in	150-ft	1
35.5-in	150-ft	1
46-in	150-ft	1
4-in (tape)	150-ft	12

Performance values and characteristics shown are obtained through recommended test procedures. The listed values do not represent a guarantee of product performance. Values represent nominal and average values; individual roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use.



1650 Manheim Pike, Suite 202
Lancaster, Pa 17601-3088
Phone: (800) 788-7764
Fax: (717) 519-4046
Web: www.winrocspi.com



Please ask your Sales Representative about our other products and services.