



Smooth Jacketing

Features:


- Easy to apply
- An aggressive all-weather acrylic adhesive system
- Tear resistant
- Puncture resistant
- Performs well over a wide range of environmental conditions
- Durable vapor barrier
- Excellent self adhesion
- Superior resistance to UV exposure, weather and mold
- White, Silver, Black
- Smooth Finish

Application:

Application surfaces must be clean, dry and free of contaminants. Apply pressure with plastic squeegee. Tape all seams with the coordinating Proline Plus™ jointing/seaming tape, and apply pressure with squeegee.

Shelf Life & Storage:

Under ideal storage conditions of 60°F to 80°F and low humidity, shelf life is one year from date of purchase.

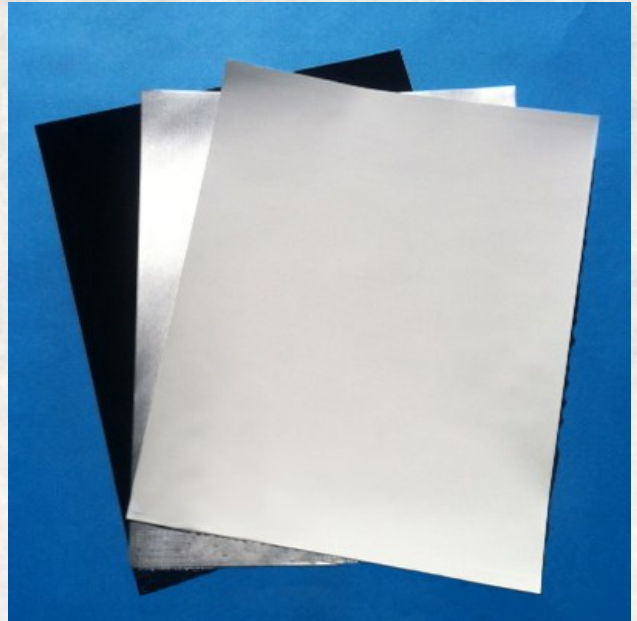

Performance Data

Test	Typical Values (English)	Typical Values (metric)	Test Method
Total Thickness without Liner	7.0 mils	0.175-mm	PSTC-133
Peel Adhesion to Stainless Steel	75-oz/in	20.9-N/25mm	PSTC-101
Self Seal Peel Adhesion	65-oz/in	18.7-N/25mm	PSTC-101
Shear Adhesion	>72 hours @ 2.2psi	>72 hours @ 15.2kPa	PSTC-107
Tensile Strength	70-lbs/in	318-N/25mm	PSTC-131
Elongation	88%	88%	PSTC-131
Permeance	0.00 perms	0.00 perms	ASTM E 96
Puncture Resistance	43.3-lbs	193-N	ASTM D 1000
Application Temperature Range	-25°F to 248°F	-32°C to 120°C	Mfg. Internal
Minimum Continuous Use Temperature	-40°F	-40°C	Mfg. Internal
Maximum Continuous Use Temperature	270°F	135°C	Mfg. Internal
Surface Burning Characteristics	< 25 Flame < 50 Smoke	< 25 Flame < 50 Smoke	UL 723* ASTM E 84

*Tested in accordance with UL 723

Roll Width	Roll Length	Rolls/Carton
23-in	150-ft	1
30-in	150-ft	1
35.5-in	150-ft	1
46-in	150-ft	1
4-in (tape)	150-ft	12

Performance values and characteristics shown are obtained through recommended test procedures. The listed values do not represent a guarantee of product performance. Values represent nominal and average values; individual roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use.



1650 Manheim Pike, Suite 202
Lancaster, Pa 17601-3088
Phone: (800) 788-7764
Fax: (717) 519-4046
Web: www.winrocspi.com



Please ask your Sales Representative about our other products and services.

January 2015